



WHAT IT TAKES TO BE
"SIMPLY THE BEST"

For over 30 years, Scag® has been the definition of quality and performance in commercial lawn mowers and lawn maintenance equipment. Today, Scag Giant-Vac® combines decades of experience with solid engineering and quality craftsmanship to create industry-leading leaf and debris equipment. We keep our products steps ahead of the rest so you can stay steps ahead of your competition.

2 SIMPLY THE BEST WWW.GIANT-VAC.COM



MULTIPLE OPTIONS, ONE EXCEPTIONAL RESULT

Serious jobs require serious equipment, and with a Scag Giant-Vac® Wheeled Blower, surface clearing has never been easier. With multiple options to choose from, you've got dependable, powerful choices at hand. Featuring top-quality components and superior construction, these low-maintenance blowers are user friendly and designed to meet the needs of homeowners, landscapers, golf courses and municipalities.

KEY FERTURES



- Heavy-duty construction for dependable strength and long life
- Impeller is dynamically balanced for smooth operation and optimum performance
- 2-degree blower tilt angle enhances ability to get airflow under leaves without losing ground clearance
- Comfortable Sure-Grip foam wrap around tubular steel iso-mounted handles
- Commercial-grade throttle control
- Dual-directional discharge nozzle for better control over debris dispersal
- Remote discharge control on handlebar (Extreme and Extreme Pro)
- Heavy-duty ¾" solid steel axles
- Tie-down bracket and lift handle (Extreme and Extreme Pro)
- Engine features low-oil shutoff



NEW EXTREME ENGINE OPTION

New Honda GX270 engine option for the Extreme. Powerful and quiet with low fuel consumption and low emissions. Precision balanced engine provides exceptionally smooth performance.



THROTTLE CONTROL

Commercial-grade, all-steel mechanical throttle control features a plastic debris cover for worry-free performance.



DISCHARGE CHUTE

Large discharge openings are positioned only 2" off the ground for better debris lifting. Front and side discharge adjustment via a simple lever. Extreme and Extreme Pro also have an adjustable discharge angle via a remote handle on the handlebar.



CLASSICTM EXTREME PROTM EXTREME PROTM

| Model | LBC15-SP170 | LBX15-GX270 | LBX15-EX27 | LBXP17-GX390 |
|--------------------|---|------------------------------|---------------------------------|-----------------------------------|
| НР | 5.7 | 8.5 | 9 | 11.7 |
| Engine | Subaru SP-170 | Honda GX270 | Subaru EX-27 | Honda GX390 |
| Frame Construction | | All-steel, welded | 12-gauge | |
| Impeller | 15", 4-blade, welded steel | 15", 6-blade, | welded steel | 17", 6-blade, welded steel |
| Impeller Mounting | Keyed crankshaft, bolt with thread-lock | | Tapered locking hub | |
| Vibration | 4-point iso-mount handles | | 8-point iso-mount handles | |
| СҒМ | 1,392 | 2,2 | 293 | 2,824 |
| Rear Wheels | 4.10 | 0 x 3.5" pneumatic Turf Safe | | 13" x 5" - 6" pneumatic Turf Safe |
| Front Wheels | 6" x 1.5" flat-free | 9" x 3.5" p | neumatic | 4.10 x 3.5" pneumatic |
| Discharge Control | Front / Side | From | nt / Side and remote angle adju | ustment |
| Monne | 1-Year Commercial; | 2 Vaar Camm | sarajal 2 Vaar Nan Cammaraja | al. 00 Day Pantal |

2-Year Non-Commercial; 90-Day Rental

SIMPLY THE BEST

See full specifications on pages 14-15.

WWW.GIANT-VAC.COM



KEY FERTURES



- Large-diameter handle with comfortable foam grip
- 14" wheels with sealed ball bearings
- Commercial-grade throttle control
- 10-gauge, all-steel welded housing with strong 7-gauge top for engine mount
- Easy-to-use intake height adjustment lever on handlebar
- EZ on/off 8-bushel debris bag with adjustable venting
- Engine features low-oil shutoff
- 10' Hose Kit available as an accessory for landscape beds, flower boxes and islands; no-tool installation and removal



HEIGHT ADJUSTMENT

Convenient intake height adjustment handle is mounted within easy reach on the handlebar for operator convenience.



26" wide intake features five height positions to match different job needs.

YARD VAC

| Model | YV14-EA190 |
|-------------------|---|
| HP | 5.5 |
| Engine | Subaru EA190 |
| Impeller | 14.25", 4-blade, welded, debris-reducing design |
| Impeller Mounting | Keyed crankshaft, bolt with thread-lock |
| Housing | All-steel, welded, 10-gauge with 7-gauge top for engine mount |
| Intake | 26", 5-position adjustable height |
| Wheels | 14", flat-free with bearings |
| Bag | 8-bushel wet/dry combo bag |
| Accessories | Hose Kit (10' length, 4" diameter) |
| Warranty | 1-Year Commercial; 2-Year Non-Commercial; 90-Day Rental |

PRODUCTIVITY IS IN THE BAG

When the task calls for a direct capture vacuum, make the Scag Giant-Vac® Yard Vacuum your go-to machine. Its heavy-duty construction and simple-to-use operation provide years of reliable, productive performance. Designed with a debris-reducing impeller and an E-Z on/off wet/dry bag, this vacuum has the power to make quick work out of the toughest jobs, in all conditions.



SIMPLY THE BEST WWW.GIANT-VAC.COM See full specifications on pages 14-15.









- Heavy-duty, all-steel welded construction
- 20" diameter, welded steel impeller with thick steel blades
- Replaceable ¼" wear liners in blower housing
- Easy rear access to wear plates and impeller
- Reliable electric start (battery included)
- Adjustable hose boom and spring-pin transport lock
- Ambidextrous nozzle handle
- Comes standard with 4" skid risers; swing-away hitch-mount option available (TLS20-18BV)
- Quick-detach hose for quick and easy transport, storage and cleaning
- Transport lock pin secures the intake nozzle to the loader when not in use
- Optional Halogen Light Kit available

Below: Optional Swing-Away Hitch-Mount Accessory (available for TLS20-18BV model only).







SKID-MOUNT


INDUSTRIAL SKID-MOUNT

| Model | TLS20-18BV | TLS20W-29BV |
|----------------------|--|---|
| НР | 18 | 29 |
| Engine | Briggs & Stratton Vanguard V-Twin, Electric Start | Briggs & Stratton Vanguard Big Block, V-Twin, Electric Start |
| Fuel Capacity (U.S.) | 1.5 gallons | 5.5 gallons |
| CFM Output | 3,075 | 4,680 |
| Impeller / Housing | 20" welded steel, 4 blades in 6" wide housing | 20" welded steel, 4 blades in 7.5" wide housing |
| Impeller Mounting | Tapered Id | ocking hub |
| Hose | 144" length, Quick-detach, 10" diameter intake hose, .045 black | 120" length, Quick-detach, 12" diameter intake hose, .045 black |
| Accessories | Swing-Away Hitch-Mount accessory (Class III hitch or heavier required); Halogen Light Kit; Stack Extension | Halogen Light Kit; Stack Extension |
| Warranty | 2-Year Commercial; 2-Year No | on-Commercial; 90-Day Rental |

SIMPLY THE BEST

See full specifications on pages 14-15.

WWW.GIANT-VAC.COM

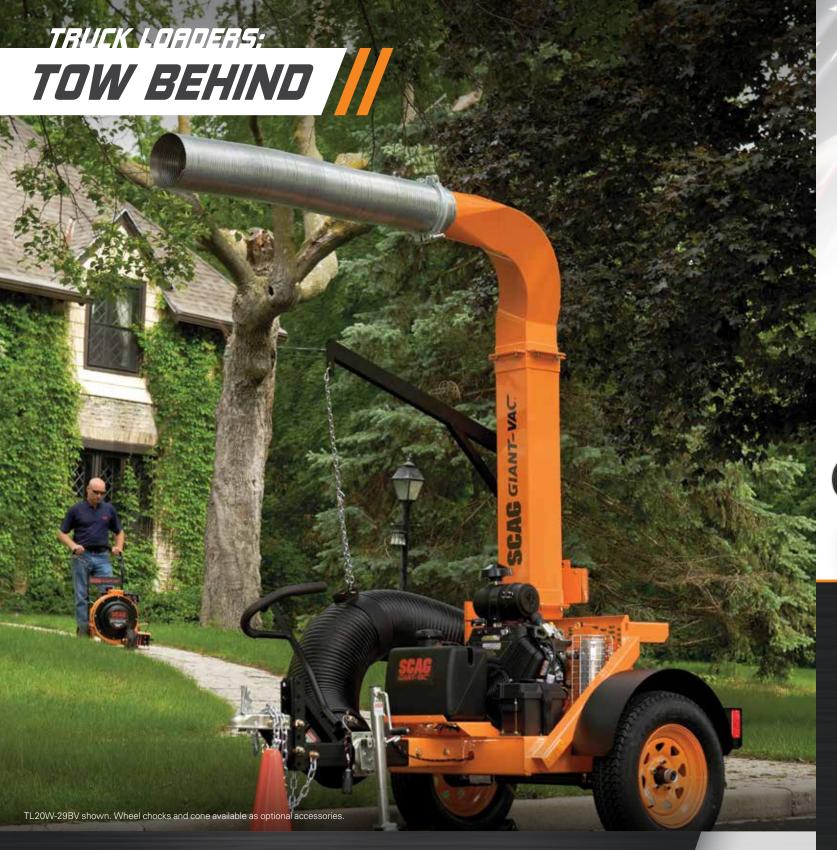

HIGH PERFORMANCE MEETS HEAVY-DUTY DESIGN

If you're looking for exceptional efficiency and durable design, these rugged and reliable highway-ready loaders have you covered. Scag Giant-Vac® Tow Behind Truck Loaders feature a heavy-duty, welded steel impeller, debris-reducing design and easily replaceable bolt-in wear liners. Featuring two engine options and a reassuring 2-year warranty, these tough and powerful truck loaders are ready to start loading up the profits.







- 20" diameter welded steel impeller with 3/8" thick steel blades
- Adjustable hose boom with chain support and spring-pin transport lock
- Convenient bolt-in replaceable ¼" steel wear liners
- Rear access to wear plates and impeller
- Reliable electric start (battery and all-weather box included)
- Ambidextrous nozzle handle
- Torflex[®] (2,000 lbs.) heavy-duty axles
- Highway ready*:
- Fenders, safety chains, tail lights, side markers and license plate bracket
- Optional Roadside Package (traffic cones and wheel chocks with holders)
- Front swivel jack with wheel and rear stand
- Standard 3-hole tool rack
- Height-adjustable 2" ball hitch standard; will also accept a pintle hitch or 2 5/16" ball hitch
- 3-position adjustable-length trailer tongue
- Transport lock pin secures the intake nozzle to the trailer when not in use
- Various accessories available



KOHLER ELECTRONIC FUEL INJECTION

TL20W-29BV shown

BRIGGS & STRATTON VANGUARD BIG BLOCK

| Model | TL20W-26CH-EFI | TL20W-29BV |
|----------------------|---|--|
| НР | 26.5 | 29 |
| Engine | Kohler Command EFI, V-Twin, Electric Start | Briggs & Stratton Vanguard Big Block, V-Twin, Electric Start |
| Fuel Capacity (U.S.) | 5.5 g | allons |
| СҒМ | 4,0 | 680 |
| Impeller / Housing | 20" welded steel, 4 blad | des in 7.5" wide housing |
| Impeller Mounting | Tapered le | ocking hub |
| Hose | 120" length, 12" diameter intake hose, .045 bla | ack thermoplastic rubber, wire helix wearstrip |
| Accessories | Brake Kit; Roadside Package (traffic cones & | wheel chocks with holders); Halogen Light Kit |
| Warranty | 2-year Commercial; 2-year N | on-Commercial; 90-day Rental |

*Reference your local regulations to ensure compliance. See full specifications on pages 14-15.

TRUCK LOADERS:

INDUSTRIAL TOW BEHIND



WHEN YOU REALLY NEED TO "BRING IT"

When only the toughest, most powerful equipment will do, the Scag-Giant Vac® Industrial Tow Behind Truck Loader delivers. Designed to handle the needs of even the most demanding professional landscapers, golf courses and municipal operations, our Industrial Tow Behind Truck Loaders represent the pinnacle of power and performance. Featuring an ultra-duty impeller with $\frac{1}{2}$ " thick blades, commercial-grade hose boom and three powerful engine options—this machine means business.



KEY FERTURES





- 25" diameter welded steel impeller with ½" thick steel blades
- Adjustable hose boom with chain support and spring-pin transport lock
- Convenient bolt-in replaceable ¼" steel wear liners
- Reliable electric start (battery and all-weather box included)
- Ambidextrous nozzle handle
- 4-ply tires with Torflex® (3,500 lbs.) heavy-duty axles
- Highway ready*:
- Fenders, safety chains, tail lights, side markers and license plate bracket
- Standard Roadside Package (traffic cones and wheel chocks with holders)
- Front swivel jack with wheel and rear stand
- Standard 3-hole tool rack
- Height-adjustable 2 ⁵/₁₆" ball hitch (35BV & 37CH) or pintle hitch (48KBD) standard
- 3-position adjustable-length trailer tongue on TLB25-35BV and TLB25-37CH models
- Transport lock pin secures the intake nozzle to the trailer when not in use
- Various accessories available



BRIGGS & STRATTON VANGUARD BIG BLOCK

KOHLER COMMAND

KUBOTA DIESEL

| Model | TLB25-35BV | | TLB25-37CH | TLB25-48KBD |
|----------------------|--|-------|--|--|
| НР | 35 | | 37 | 48 |
| Engine | Briggs & Stratton Vanguard Big Block V-Twin, Electric Start | | Kohler Command, V-Twin, Electric Start | Kubota, 4-cylinder, Liquid-Cooled, Electric Start |
| Fuel Capacity (U.S.) | | / | 8.5 gallons | |
| СҒМ | 6,781 | | 6,909 | 7,318 |
| Impeller / Housing | | 25 | welded steel, 4 blades in 10.5" wide housing | |
| Impeller Mounting | | | Straight bore | |
| Hose | 84" length, 16" di | amete | r intake hose, .045 blue thermoplastic rubber, | wire helix wearstrip |
| Hitch Class Required | | | 10,000 lbs. | |
| Accessories | | | Brake Kit; Halogen Light Kit | |
| Warranty | | | 2-year Commercial; 90-day Rental | |

| S GIA | G NT- | VA(| |
|----------|----------|-----|--|
| | | | |

| YAR | |
|-------------|--|
| RO BO | |
| EXTREME PRO | |
| | |
| | |

| 1-Year Commercial; 2-Year Non-Commercial, 90-Day Rental | | 2-Year Commercial; 2-Year Non-Commercial, 90-Day Rental | al; roial, | 1-Year Commercial; 2-Year Non-Commercial, 90-Day Rental |
|---|---|---|-----------------------------------|--|
| 102 lbs. | 160 lbs. | 149 lbs. | 190 lbs. | 130 lbs. |
| 27" | 28" | | 30.25" | 26.25" |
| 43" | .26" | | .28" | 64" |
| 4.10 x 3.5" pm | 4.10 x 3.5" pneumatic Turf Safe | | 13" x 5" – 6" pneumatic Turf Safe | 14", flat-free with bearings |
| 6" x 1.5" flat-free | 9" x 3.5" pneumatic | natic | 4.10 x 3.5" pneumatic | 14", flat-free with bearings |
| | %" diameter steel | -6 | | n/a |
| | n/a | | | 5 height positions; quick-lever on handlebar |
| | n/a | | | 26" |
| n/a | Discharge angl | Discharge angle control via remote lever on handlebar | lever on handlebar | n/a |
| | Quick-lever located near discharge | discharge | | n/a |
| 16 square inches | | 26.25 square inches | es | n/a |
| 4-point iso-mount handlebar | -8 | 8-point iso-mount handlebar | dlebar | n/a |
| Tubular steel with | Tubular steel with thick, comfortable foam grip, 3-position adjustable height | p; 3-position adjustak | ole height | Tubular steel with thick, comfortable foam grip |
| 2-degree tilt at discharg | ree tilt at discharge. Allows blower to more effectively get under wet, heavy debris. | ectively get under w | et, heavy debris. | n/a |
| 4.5" | | 6.0" | | 5.5" |
| All-steel, welde | All-steel, welded, 12-gauge front and back housing plates; 14-gauge skirt | ousing plates; 14-gau | ige skirt | All-steel, welded, 10-gauge with 7-gauge top for engine mount |
| 15" / 3.5" | 15" / 4.25" | | 17" / 4.25" | 14.25" / 4.25" |
| Keyed crankshaft, bolt with thread-lock | | Tapered locking hub | qn | Keyed crankshaft, bolt with thread-lock |
| All-steel, welded, 4-blade, dynamically balanced | All-steel, we | All-steel, welded, 6-blade, dynamically balanced | nically balanced | All-steel, welded, 4-blade, dynamically balanced |
| | All-steel, welded 12-gauge | gauge | | n/a |
| 1,392 | 2,293 | | 2,824 | n/a |
| 5.7 | 8.5 | 9.0 | 11.7 | 5.5 |
| Subaru SP-170 | Honda GX270 | Subaru EX-27 | Honda GX390 | Subaru EA190 |
| LBC15-SP170 | LBX15-GX270 | LBX15-EX27 | LBXP17-GX390 | YV14-EA190 |

SPECIFICATIONS

KOHLER ELECTRON FUEL INJECTION

INDUSTRIAL Skid-mount

SKID-MOUNT

| VANGUARD | BIG BLOCK | |
|----------|------------------|--|
| INIC | Z | |

VANGUARD BIG BLOCK

KOHLER COMMAND

All specifications subject to change without notice or obligation.

| Model | TLS20-18BV | TLS20W-29BV | TL20W-26CH-EFI | TL20W-29BV | TLB25-35BV | ТLВ25-37СН | TLB25-48KBD |
|-----------------------------|---|--|---|--|--|---|---|
| Engine | Briggs & Stratton Vanguard V-Twin, Electric Start | Briggs & Stratton Vanguard Big Block, V-Twin, Electric Start | Kohler Command EFI, V-Twin, Electric Start | Briggs & Stratton Vanguard Big Block, V-Twin, Electric Start | Briggs & Stratton Vanguard Big Block, V-Twin, Electric Start | Kohler Command, V-Twin, Electric Start | Kubota, 4-cylinder, Liquid-Cooled, Electric Start |
| НР | 18 | 29 | 26.5 | 29 | 35 | 37 | 48 |
| Fuel Capacity / Tank | 1.5 gallons / engine-mounted metal tank | 5.5 gallons / plastic tank with built-in fuel gauge | 5.5 gallons / plastic tank with built-in fuel gauge | with built-in fuel gauge | 8.5 gallons, | 8.5 gallons, steel tank with built-in fuel gauge | jauge |
| CFM Output | 3,075 | 4,680 | 4,6 | 4,680 | 6,781 | 606'9 | 7,318 |
| Frame Construction | All steel, welded | pə | All steel, | All steel, welded | | All steel, welded | |
| Impeller Construction | 4-blade, ¾ thick blades, all steel, welded | l steel, welded | 4-blade, ¾" thick blac | 4-blade, ¾ thick blades, all steel, welded | 4-blade, } | 4-blade, ½" thick blades, all steel, welded | pep |
| Impeller Mounting | Tapered locking hub | hub | Tapered Ic | Tapered locking hub | <i>/</i> | Straight bore | |
| Impeller Diameter / Width | 20" / 5.25" | 20" / 6.5" | 20" / 6.5" | 6.5" | | 25" / 9" | |
| Blower Housing Construction | Removable back panel for easy impeller & wear plate access | ller & wear plate access | Removable back panel for easy | Removable back panel for easy impeller & wear plate access | Removable back pa | Removable back panel for easy impeller & wear plate access | plate access |
| Blower Housing Width | 9 | 7.5" | 7.5" | 5" | | 10.5" | |
| Blower Housing Wear Plates | Standard - 1⁄4" steel, replaceable | placeable | Standard - ¼" st | Standard - ¼" steel, replaceable | Stan | Standard - ¼" steel, replaceable | |
| Hose Specification | 144" length, 10" diameter quick-detach intake hose, .045 black | 120" length, 12" diameter quick- detach intake hose, .045 black | 120" length, 12" diamete thermoplastic rubber, w | 120" length, 12" diameter intake hose, .045 black thermoplastic rubber, wire helix with wearstrip | 84" length, polyurethane | 84" length, 16" diameter intake hose, .045 blue polyurethane reinforced, wire helix with wearstrip | 5 blue rearstrip |
| Unit Mounting | 4" steel skid risers | 4" steel skid risers | Hitch: At least | Hitch: At least Class III rating | Hitc | Hitch: At least Class III rating | |
| Discharge Tube | Metal, flex pipe, 7" diameter | Metal, flex pipe, 8" diameter | Metal, flex pipe, 8" diameter | e, 8" diameter | Me | Metal, flex pipe, 12" diameter | |
| Throttle Control | Commercial-grade, all steel mechanical, plastic debris cover | ical, plastic debris cover | Commercial-grade, all steel me | Commercial-grade, all steel mechanical, plastic debris cover | Commer | Commercial-grade, all steel mechanical | cal |
| Highway Ready* | n/a | | Yes - Optional Roa | Yes - Optional Roadside Kit available | Yes - Si | Yes - Standard Roadside Kit included | p |

2-Year Commercial; 90-Day Rental

2,300 lbs.

1,700 lbs.

1,060 lbs.

990 lbs.

75" (without skid-mount attached)

74.25" (without skid or hitch-mount attached)

Trailer Width

2-Year Commercial; 2-Year Non-Commercial, 90-Day Rental

2-Year Commercial; 2-Year Non-Commercial, 90-Day Rental

121.25"

66.75"

Heavy-duty Dexter Torflex® axle - 3,500 lbs

Heavy-duty Dexter Torflex $^{
m o}$ axle - 2,000 l

53.5"

SIMPLY THE BEST





©2015 All information and specifications are accurate as of the date of publication. Because we strive to continually improve our products, Scag reserves the right to make changes at any time without notice or obligation.

ROAD Road Racing AMERICA HIS Best







